

GVI

Genel Özellikler / General Specifications

Ölçü / Dimensions: 3", 8"/DN65 – DN200

Anma Basıncı / Nominal Pressure: 500 psi (35,0 bar)


Çalışma Sıcaklığı / Working Temperature: -20°C/+80°C

Marka / Brand: Global Vision



Ürün sayfası için
okutun

Scan for
product page

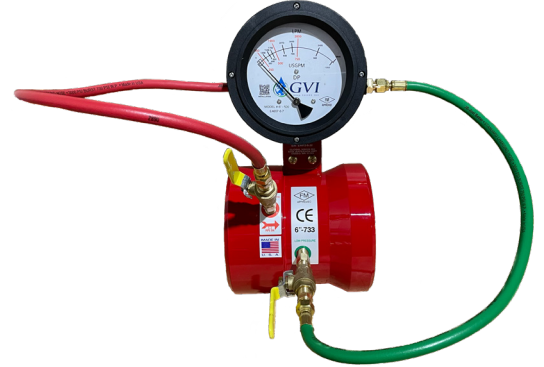

Standartlar / Standards

Sertifikalar / Certificate: FM



Pompa sistemlerinin belirli periyotlarla istenilen debiyi geçirip geçirmediği kontrol edilmesi için kullanılır. Debi ölçer genellikle pompa basma hatlarında çek valf ile OS&Y vana arasına montaj edilir. Debi ölçer çapı pompa debisine göre belirlenmektedir.

It is used for periodical control of the pump systems whether the desired flow rate is achieved. The flow meter is usually mounted between check valve and OS&Y valve in pump discharge lines. The diameter of the flowmeter is determined by the pump flow.



Montaj Detayı Assembly Detail

WASTE
DISCHARGE

THROTTLE
VALVE

AIR
VENT

BY-PASS
VALVE

PIPE DIAMETERS FROM VALVE

SUPPLY

FIRE PUMP TYPICAL PIPING

VALVE

SYSTEM VALVE

No	Boru Çapı Line Size	Pompa Debisi GPM	Ölçme Aralığı Meter Range Min. & Max. GPM	Ölçme Aralığı Meter Range Min. & Max. LPM	Model Numarası Model Number
1	3"	200	100 – 400	379 – 1.514	3"-200-B
2	8"	3.000	1.500 – 6.000	5.6778 – 22.712	8"-3.000-B