



Operating Guide

AB-QM DN 40-100 / 73693790


AB-QM DN 40-100




DN 40/50





DN 50

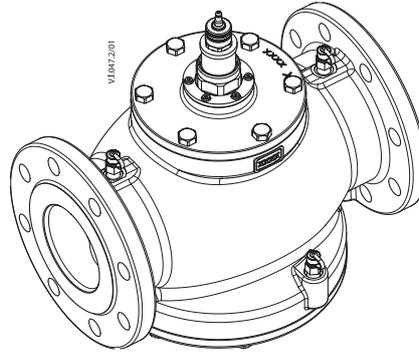


DN 65-100




Installation

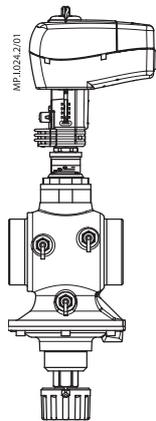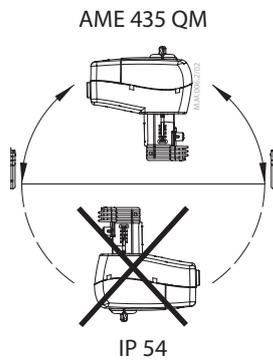




DN 40/50

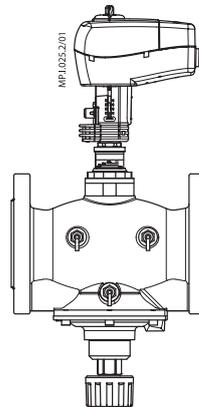

DN 50

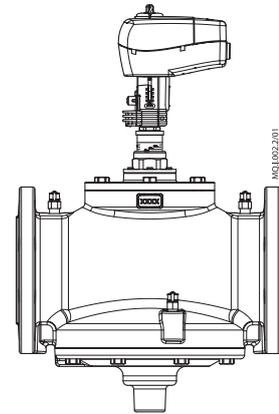

DN 65-100





AME 435 QM



Code No.: 003Z0695

AB-QM DN 40-100


Shut off

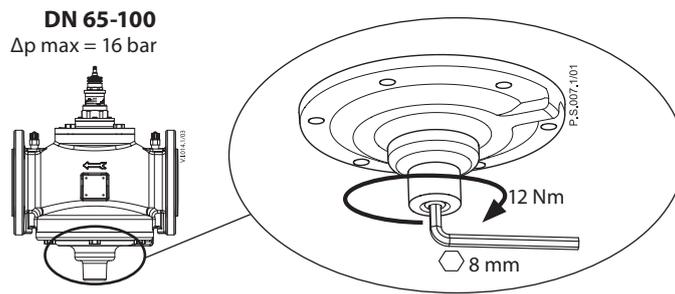


Setting

Note: best before applying pressure

DN 40/50

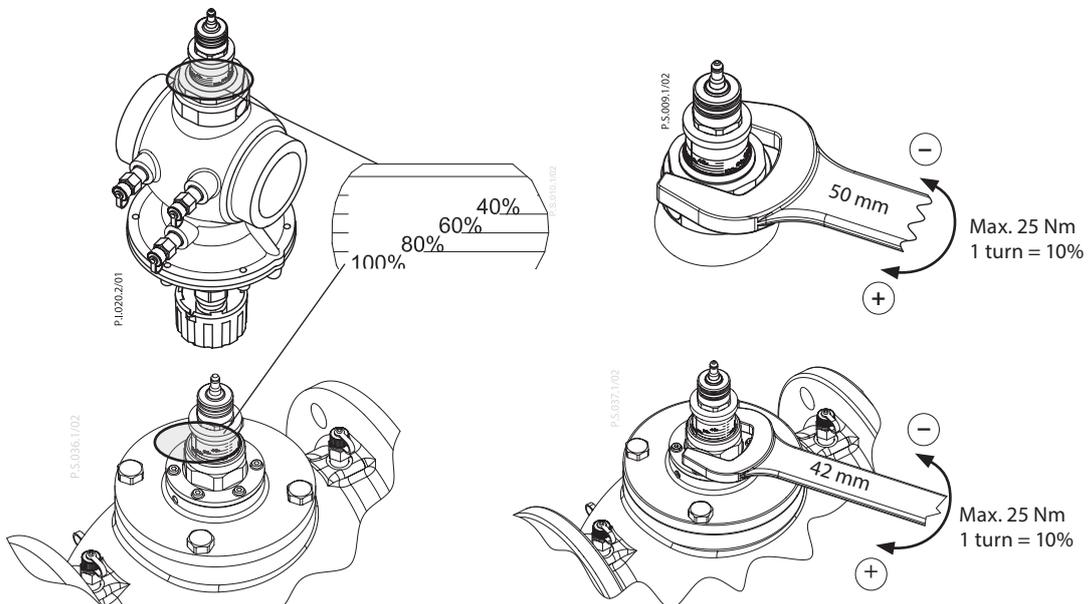


DN 65-100

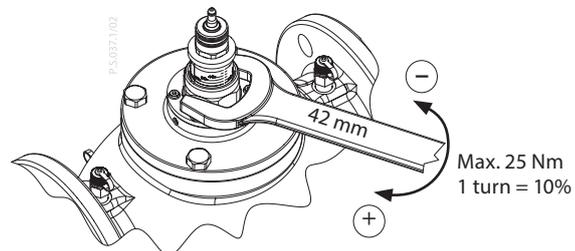

Resetting


DN 40-100

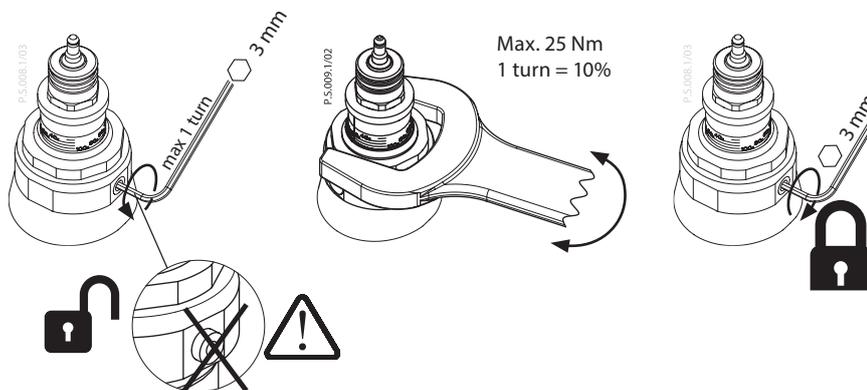


AB-QM DN 40-100

Locking


DN 40/50




DN 65-100

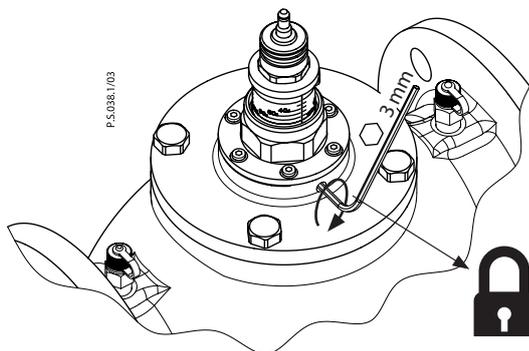


Measuring

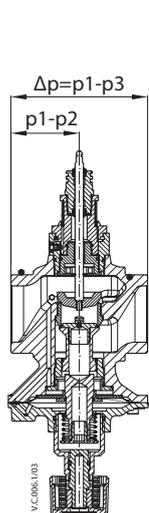

DN 40/50

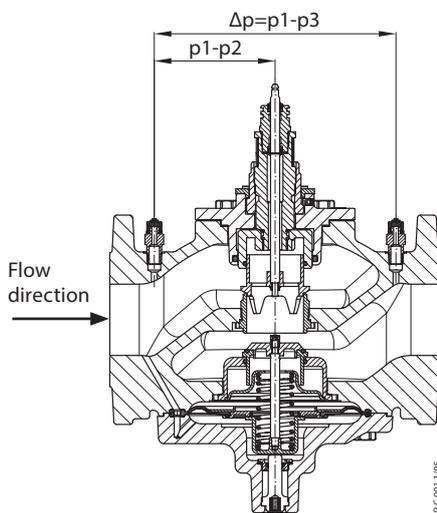

DN 65-100

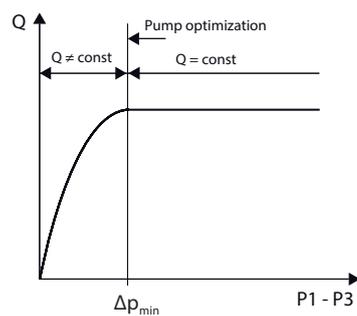

AB-QM DN 40-100



-10...95 °C



PN 16



$\Delta p_{max} = 600 \text{ kPa (6 bar)}$

DN 40	L/h	L/s	GPM
20%	1,500	0.416	6.6
25%	1,875	0.520	8.3
30%	2,250	0.625	9.9
35%	2,625	0.729	11.6
40%	3,000	0.833	13.2
45%	3,375	0.937	14.9
50%	3,750	1.041	16.5
55%	4,125	1.145	18.2
60%	4,500	1.250	19.8
65%	4,875	1.354	21.5
70%	5,250	1.458	23.1
75%	5,625	1.562	24.8
80%	6,000	1.666	26.4
85%	6,375	1.770	28.1
90%	6,750	1.875	29.7
95%	7,125	1.979	31.4
100%	7,500	2.083	33.0

Note: 1 turn = 10%

DN 50	L/h	L/s	GPM
40%	5,000	1.386	22.0
45%	5,625	1.562	24.8
50%	6,250	1.736	27.5
55%	6,875	1.909	30.3
60%	7,500	2.083	33.0
65%	8,125	2.256	35.8
70%	8,750	2.430	38.5
75%	9,375	2.604	41.3
80%	10,000	2.777	44.0
85%	10,625	2.951	46.8
90%	11,250	3.125	49.5
95%	11,875	3.298	52.3
100%	12,500	3.472	55.0

Note: 1 turn = 10%

DN 65	Flow			High Flow		
	L/h	L/s	GPM	L/h	L/s	GPM
40%	8,000	2.22	35.2	10,000	2.78	44.0
45%	9,000	2.50	39.6	11,250	3.13	49.5
50%	10,000	2.78	44.0	12,500	3.47	55.0
55%	11,000	3.06	48.4	13,750	3.82	60.5
60%	12,000	3.33	52.8	15,000	4.17	66.0
65%	13,000	3.61	57.2	16,250	4.51	71.5
70%	14,000	3.89	61.6	17,500	4.86	77.0
75%	15,000	4.17	66.0	18,750	5.21	82.5
80%	16,000	4.44	70.4	20,000	5.56	88.0
85%	17,000	4.72	74.9	21,250	5.90	93.5
90%	18,000	5.00	79.3	22,500	6.25	99.0
95%	19,000	5.28	83.7	23,750	6.60	104.5
100%	20,000	5.56	88.1	25,000	6.94	110.0

Note: 1 turn = 10%

DN 80	Flow			High Flow		
	L/h	L/s	GPM	L/h	L/s	GPM
40%	11,200	3.11	49.3	16,000	4.44	70.5
45%	12,600	3.50	55.5	18,000	5.00	79.3
50%	14,000	3.89	61.6	20,000	5.56	88.1
55%	15,400	4.23	67.8	22,000	6.11	96.9
60%	16,800	4.67	74.0	24,000	6.67	105.7
65%	18,200	5.10	80.1	26,000	7.22	114.5
70%	19,600	5.44	86.3	28,000	7.78	123.3
75%	21,000	5.83	92.5	30,000	8.33	132.2
80%	22,400	6.22	98.6	32,000	8.89	141.0
85%	23,800	6.61	104.8	34,000	9.44	149.8
90%	25,200	7.00	111.0	36,000	10.00	158.6
95%	26,600	7.39	117.1	38,000	10.56	167.4
100%	28,000	7.78	123.3	40,000	11.11	176.2

Note: 1 turn = 10%

DN 100	Flow			High Flow		
	L/h	L/s	GPM	L/h	L/s	GPM
40%	15,200	4.22	67.0	23,600	6.56	104.0
45%	17,100	4.75	75.3	26,550	7.38	117.0
50%	19,000	5.28	83.7	29,500	8.19	130.0
55%	20,900	5.81	92.1	32,450	9.01	143.0
60%	22,800	6.33	100.4	35,400	9.83	155.9
65%	24,700	6.86	108.8	38,350	10.65	168.9
70%	26,600	7.39	117.2	41,300	11.47	181.9
75%	28,500	7.92	125.6	44,250	12.29	194.9
80%	30,400	8.44	133.9	47,200	13.11	207.9
85%	32,300	8.97	142.3	50,150	13.93	220.9
90%	34,200	9.50	150.7	53,100	14.75	233.9
95%	36,100	10.03	159.0	56,050	15.57	246.9
100%	38,000	10.56	167.4	59,000	16.39	259.9

Note: 1 turn = 10%

ІМПОРТЕР:

UA: ТОВ з ІІ «Данфосс ТОВ», вул. Вікентія Хвойки, 15/15/6, м. Київ, 04080, Україна

Danfoss A/S

Climate Solutions • danfoss.com • +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues descriptions, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the product.

All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.